


VOYAGER™

FULLY AUTOMATIC VERTICAL L BAR SEALER

Advantages

- Fully automatic vertical packager up to 60 packages/minute
- User-friendly HMI and programmable changeover
- Operator interface panel on a swivel arm that is easy to navigate and has easy to change machine settings
- Durable construction ready for production 24/7
- Servo driven film feed and adjustable film guide provides easy tool-less changeover
- Versatile packager for sizes up to 18" x 32"

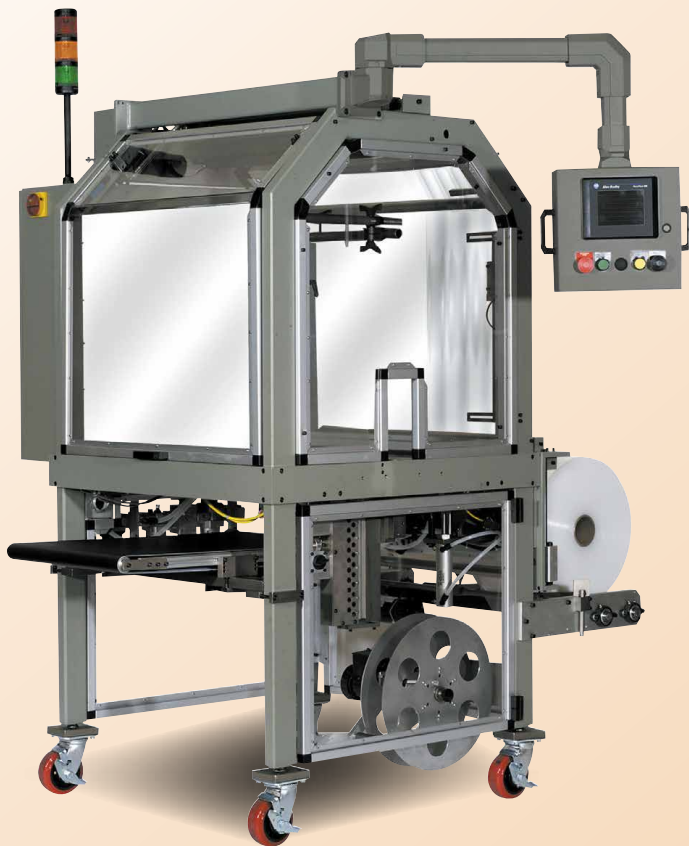

Features and Options	VOYAGER
Constant Coated Seal System	N/A
Tri Bar Seal System	S
Low Energy Seal System	N/A
Uptime Seal Jaw	S
Adjustable Jaw Opening	N/A
Tool-less Film Guides	S
Leg & Height Adjustments	S
Casters	S
Multiple Control Platforms	N/A
Light Screen Cycling Mechanism & Perimeter Interlocked Guarding	S
Jaw Guards	O
Discharge Conveyors	O
Pin Perforator	O
Electric Eye Film Registration	O
Header Sealer	O
Static Eliminator	O
Hole Punch	O
Film Cart	O
Powered Film Cradle	S
Trim Break Detection Eye	O
Trim Wind Up	S
Large Trim Wind Up	O
Spare Assemblies & Parts Kits	O
Servo Film Feed	S


Key: S=Standard, O=Optional, N/A=Not Applicable

Specifications

Machine Dimensions	54"w x 48"d x 70¾"h (137 cm x 131.9 cm x 179.5 cm)
Standard Vertical Seal	14" (35.6 cm)
Standard Horizontal Seal	24" (60.8 cm)
Standard Jaw Opening	4½" (11.4 cm)
Electrical Requirements	220/240 v, 60 HZ, 1 ph, 8-14 amps*
Air Requirements	.16 CFM per machine cycle at 80 PSI**

*Special electrics available upon request

**CFM will vary depending on added options

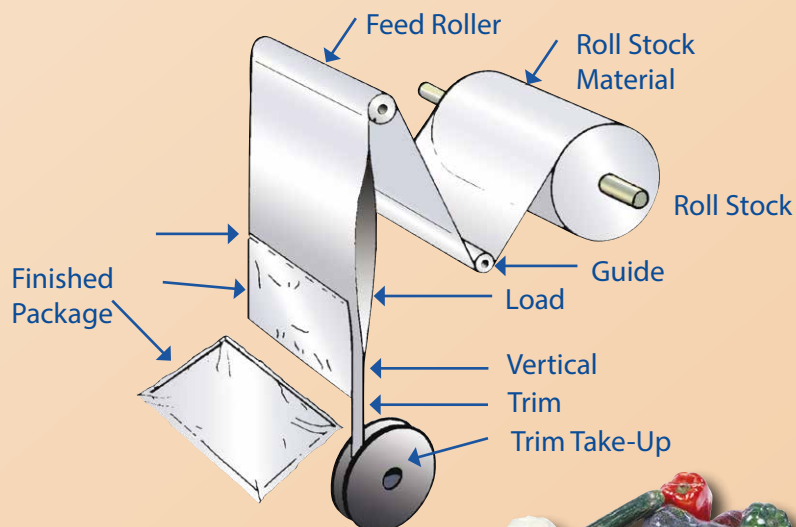

A or B wind material can be used on any of the Rennco vertical models. Bag size changeover is accomplished by simply changing roll stock to the desired width, and adjusting the vertical adjustment wheel or control for different lengths.
Rev 060310

PO Box 116
300 Elm St.
Homer, MI 49245
USA
www.Rennco.com

Toll-Free: 800-409-5225
International: 517-568-4121
Fax: 517-568-4798
Email: sales@rennco.com

